

## Project:

Water repelling, breathable acrylic paint for interior and exterior application

## Product:

SurfaPaint Aqua X

## Key Benefits:

- Water repellent
- Cool paint
- High Breathability
- Excellent adhesion
- High coverage and opacity
- Reduces dust accumulation
- Reduces mould growth
- Excellent washability
- Low VOC
- Environmentally friendly

## Applications:


- Interior and Exterior surfaces
- Masonry



## SurfaPaint Aqua X

### Water repelling breathable acrylic paint for interior and exterior application

SurfaPaint Aqua X is a water based acrylic paint that provides effective water repellency. It prevents the external humidity and rainwater from penetrating into the building substrate, reducing cracking and swelling. SurfaPaint Aqua X is ideal for applications on buildings in urban areas or sea-side, where increased levels of humidity exist. SurfaPaint Aqua X is characterized as cool due to its high solar reflectance.

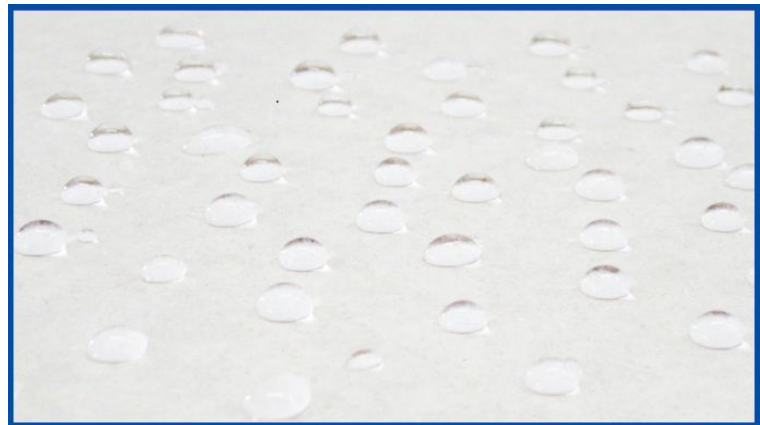

**ECRC** EUROPEAN  
COOLROOFS  
COUNCIL

**RATED PRODUCT**

<http://coolroofcouncil.eu>

Product ID: FA00000003

## Packaging:

10 L pails

[www.NanoPhos.com](http://www.NanoPhos.com)

SurfaPaint® is a registered trademark of  
**NanoPhos SA**,  
PO Box 519,  
Science & Technology Park of Lavrio  
Lavrio 19500, Greece  
T: +302292069312 F: +302292069303  
E: [info@NanoPhos.com](mailto:info@NanoPhos.com)

**NanoPhos**  
Pioneering  
Nanotechnology 

## SurfaPaint Aqua X Description

SurfaPaint Aqua X is a water repelling paint that protects the masonry surface while it allows it to breathe. As it repels water and reduces water absorption, it prevents premature paint failure and mould growth. Subsequently, the substrate is efficiently protected and therefore not affected by external, weathering factors. SurfaPaint Aqua X exhibits its functionality for a long period of time, extending the life of the paint coated surface. The paint is white and can be tinted with pal colours. Hydrophobic properties of a SurfaPaint Aqua X are depicted below.



Water droplet on painted surface with normal paint  
Contact angle: 60°



Water droplet on painted surface with SurfaPaint Aqua X  
Contact angle: 126°

### International Standards Testing

**Reflectance (ASTM E 903-96):** total 90.98% (250-2200 nm), infrared 94.19% (700nm - 2200 nm).

**Density (ISO 2811-1):** 1.30±0.05 g/cm<sup>3</sup>

**pH (ISO 19396-1):** 8.8±0.5

**Fungal resistance (BS3900-G6:1989):** excellent resistant against fungi & algae, Class 1

**Water Vapour Permeability (cup method EN ISO 7783:2011):** Sd

**Applicability:** SurfaPaint Aqua X can be applied directly on exterior or interior wall surfaces (masonry, concrete, plaster, drywalls), and wherever water based, acrylic paints are applied. New substrates from cement or masonry should have cured for more than 3-4 weeks before primer application. For better results apply **SurfaMix P** as a primer. Adverse conditions during or immediately after application may affect the coating's properties. **Preparation:** Ensure all surfaces are clean and dry prior to application. Remove any dust and dirt. **Application note:** Stir well before application. Do not dilute for bridging gaps and hairline cracks of up to 0,5 mm. For cracks bigger than 1mm, fill the gap with a suitable putty. If thinning is required add up to 10% water by volume. Application temperature should be between 8 - 35°C. Apply 2-3 even coats using a good quality brush, roller or by spraying with a tip of a diameter 1,4mm or more. Do not over-brush. Ensure corners and edges are adequately covered. Additional coats should be applied 4-6 hours after the previous application. **Spreading Rate:** 10-12 m<sup>2</sup>/L. **Drying Time:** Typically 1 hour depending upon coat thickness. Low temperatures and high humidity will lengthen drying times. **Cleaning of tools:** All tools and equipment should be cleaned immediately after use with water. **Storage:** Store in a cool, dry, well-ventilated area away from heat and direct sunlight. Carefully reseal partly used containers. Protect from frost. To avoid risk of spillage, always store and transport in a secure and upright position. The shelf life of the product in airtight containers is 24 months post production date. Dispose of empty container responsibly and according to local legislation. **Safety:** Keep out of reach of children. Avoid breathing dust / fume / gas / mist / vapours / spray. Use only outdoors or in a well-ventilated area. If swallowed: Immediately call a poison center or doctor/physician. Do not use empty container for storing food. Avoid contact with skin and eyes. After contact with skin wash immediately with soap and water. Do not use solvent thinners. In case of contact with eyes, rinse immediately with plenty of water and if necessary seek medical advice. **VOC (Volatile Organic Compounds):** Maximum EU VOC content limit value (Directive 2004/42/CE) of the product in a ready to use condition (category A/a "Matt coatings for interior walls and ceilings", Type WB): 30 g/L (2010). **Maximum VOC content of this product is 10 g/L.**



### What is Nanotechnology?

Nanotechnology refers to the scientific field, which deals with very small structures, usually sized below 100 nm. One nanometer (nm) is one billionth of a meter (10<sup>-9</sup> m) - it is so small that if earth were one meter in diameter, then one nanometer would have been the size of an apple! Nanosized materials reveal unique properties when compared to ordinary, bulk materials or even molecules.

### NanoPhos at a glance...

At NanoPhos, we take advantage of the unique properties of nanotechnology and invent clever materials that solve every day problems. By harnessing nanotechnology, we seek to create a more comfortable, safe and trouble-free living environment. We transfer innovations out of our lab into the hands of consumers. Our vision is clear: "Tune the nanoworld to serve the macroworld" – in simple terms we make nanoparticles solve common problems. NanoPhos was recognized in January of 2008 by Bill Gates as one of the most innovative companies NanoPhos has been selected as a National Champion representing Greece in the 2016/17 European Business Awards for Innovation. NanoPhos is actively expanding its distribution network. Currently, the company is present in the UK, Scandinavia, Portugal, Spain, France, Germany, Italy, Greece, Cyprus, Romania, Egypt, Sudan, Saudi Arabia, Bahrain, UAE, Qatar, Oman, Iran, India, New Zealand, China, Japan, Mexico, Guatemala, Malaysia, Indonesia and Singapore.



NanoPhos SA has been approved by Lloyd's Register Quality Assurance to follow the EN ISO 9001:2000 Quality, the EN ISO 14001:2004 Environmental and the OHSAS 18001:2007 Occupational Health and Safety Management Systems for the development, production and sales of nanotechnology marine coatings and chemical products for cleaning and protection of surfaces and nanotechnology products.

LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY. The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that NanoPhos' products are safe, effective, and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent. NanoPhos specifically disclaims any other expressed or implied warranty of fitness for a particular purpose or merchantability. NanoPhos disclaims liability for any incidental or consequential damages. This product is neither tested nor represented as suitable for medical or pharmaceutical uses.

ver 0916